

**BERGER**  
**WORLDWIDE**  
Since 1760



**BERGER PAINTS INTERNATIONAL LIMITED.**

Plot No. 37, Mbozi Road, Chang'ombe, Dar es Salaam, Tanzania. | Tel: +255 22 2860360/1 | Fax: +255 22 2863795  
Hotline: +255 688 000 777 | Email: [info@bergerpaintsintl.com](mailto:info@bergerpaintsintl.com) | Website: [www.bergerpaintsintl.com](http://www.bergerpaintsintl.com)  
**Arusha Branch:** P.O. Box 13632, Arusha, Tanzania. | Tel: +255 27 544781 | Cell: +255 687 014017  
**Mwanza Branch:** P.O. Box 1780, Mwanza, Tanzania. | Cell: +255 687 014006  
**Mbeya Branch:** P.O. Box 718, Mbeya, Tanzania. | Cell: +255 687 014023 / 32


**Robbialaac**  
*...the Better Paint!*

**WEATHER  
GUARD PLUS**



- Premium quality water based acrylic paint
- Extremely hardy to weathering
- The ultimate paint for exterior application
- Strong anti mould and antifungal properties
- 8 to 10 m<sup>2</sup>/litre



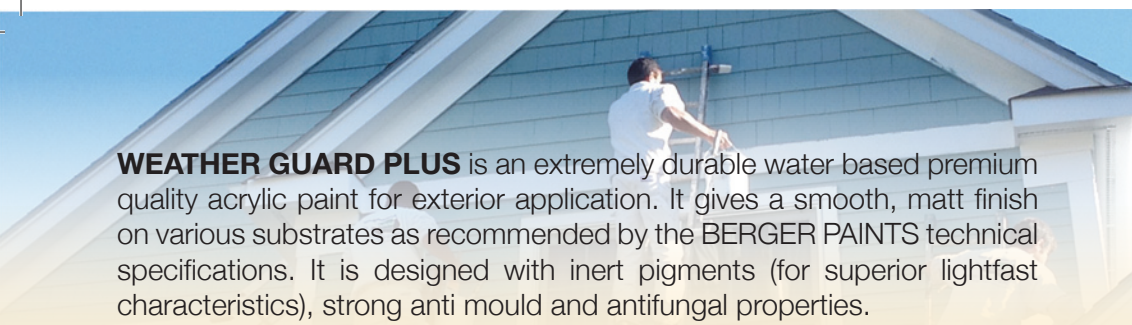

**WEATHER GUARD PLUS** is an extremely durable water based premium quality acrylic paint for exterior application. It gives a smooth, matt finish on various substrates as recommended by the BERGER PAINTS technical specifications. It is designed with inert pigments (for superior lightfast characteristics), strong anti mould and antifungal properties.

**Usage:** Recommended for exterior usage as a robust system that can combat extreme weather conditions to a larger extent.

**Availability:** Is available in white and various shade range as per BERGER shade card and COLORIZER.

**Surface preparations:** The surface to be painted needs to be clear of all grease, laitance and fungal growth. For best results use ROBBIALAAC ANTIFUNGICIDE WASH for effective preparation. STUCCO PUTTY-EXTERIOR can be applied to fill all cracks and surface undulation for smooth surface. We recommend applying one coat of BERGER ACRYLIC PRIMER to provide thorough binding of WEATHER GUARD PLUS top coat. Two to three coats of WEATHER GUARD PLUS can be applied as required, giving three to four hours gap between coats. Painted surfaces that require refurbishing can be prepared by removing the flakey old paint and proceeding with the procedure described above.

**Thinning recommendation:** Soft water and to the extent of maximum of 10% of the paint.


**Method of application:** By roller/brush and if large areas are to be painted one can use suitable spray application. To keep the brush/roller and spray equipment in good condition for use, clean the same in Luke warm water and dry them immediately after application.

**Spillage and disposal:** In case of accidental spillage, cover it with inert material sand/saw dust and can be disposed as per local regulations.

**Storage:** The material is to be stored in well ventilated rooms at an ambient temperature not more than 35°C and in original containers.

**Shelf Life:** Best before one year from the date of manufacture in original sealed container. Identification labels convey all relevant matters.

**FOR FURTHER INFORMATION ON THE PRODUCT PLEASE REFER TO THE TDS/MSDS**



**WEATHER GUARD PLUS** ni rangi ya maji imara iliyotengenezwa kwa gundi aina ya acrylic kwa ajili ya matumizi ya nje. Ni laini na ina mwonekano usiongara inapopakwa katika maeneo tofauti kama inavyopendekezwa na kitengo cha ufundi BERGER PAINTS. Imetengenezwa na malighafi zisizo athiriwa na mwanga wa jua, pia ni madhubuti dhidi ya wadudu waharibifu.

**Matumizi:** Ni kwa ajili ya matumizi ya maeneo ya nje na inadumu katika hali ngumu ya hali ya hewa.

**Upatikanaji:** Inapatikana katika rangi nyeupe na rangi tofauti tofauti kulingana na kitabu cha rangi cha BERGER na COLORIZER

**Maandalizi ya eneo:** Eneo linalopakwa rangi liwe safi na bila ya grease, tumia ROBBIALAAC ANTIFUNGICIDE WASH kwa kuulia wadudu aina ya fungus, tumia STUCCO PUTTY-EXTERIOR kujazia nyufa na kunyoosha kuta, ili kupata matokeo mazuri zaidi tumia mpako mmoja wa BERGER ACRYLIC PRIMER kisha paka WEATHER GUARD PLUS. Mpako mmoja, miwili au zaidi ya WEATHER GUARD PLUS, yaweza kupakwa ukiacha masaa matatu mpaka manne kila baada ya mpako. Kama eneo lako lilishapakwa rangi yafaa kuondoa rangi kisha fuata utaratibu uliolezwa hapo juu.

**Jinsi ya Kuchanganya:** Tumia maji masafi kwa kiwango cha 10% ya ujazo wa rangi.

**Jinsi ya kupaka rangi:** Kwa kutumia roller au brashi, kama eneo ni kubwa waweza pia tumia spray gun. Safisha roller/brashi na spray gun kwa kutumia maji masafi ya vuguvugu mara tu baada ya kumaliza kupiga rangi. Kausha vifaa vyote mara baada ya kuvisafisha.

**Rangi Kumwagika na kuitupa:** Kama ikitokea ajali ya rangi kumwagika, imwagie mchanga kisha izoe na kwenda kuitupa kulingana na sheria husika.

**Kuhifadhi:** Rangi inatakiwa kuhifadhiwa kwenye eneo lenye hewa ya kutosha na joto lisilozidi nyuzi 35 za sentigrade katika ndoo yake halisi.

**Muda wa kutumika:** Yafaa kutumika mwaka mmoja tangu tarehe ya kutengenezwa ikiwa katika ndoo yake halisi kabla kufunguliwa.

**KWA MAELEZO ZAIKI KUHUSU RANGI HII REJEA KARATASI YENYE MAELEZO YA KINA NA KIUFUNDI TDS/MSDS**